



Short Link Chain

grade 8


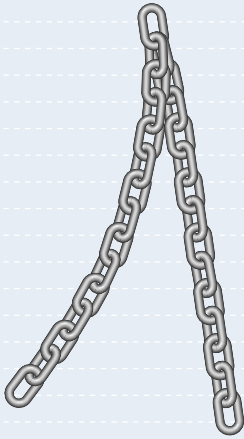


- **Material** : alloy steel, grade 8, heat treated
- **Safety factor** : MBL equals 5 x WLL
- **Finish** : self colour or black powder coated
- **Certification** : as standard a works certificate is supplied

diameter	length inside	width outside	working load limit	weight per metre
a mm	b mm	c mm	kg	kg
7	21	23	1500	1.10
8	24	26.8	2000	1.40
10	30	34	3150	2.20
13	39	43.5	5300	3.80
16	48	53.5	8000	5.70
20	60	67	12500	9.00
22	66	73.5	15000	10.90

Welded Straight Link Chain

mild steel, commercial quality



- **Material** : mild steel, grade 3
- **Finish** : self colour, electro-galvanised or hot dipped galvanised
- **Note** : supplied in reels only as shown below
- **Special Note** : this product is not suitable for lifting purposes

diameter	length inside	width outside	quantity per reel	weight per reel
a mm	b mm	c mm	m	kg
2.5	14	12	60	8.20
2.5	19	12	60	6.90
3	16	14	60	11.40
3	21	14	60	10.60
3	26	14	60	9.00
4	19	17	30	10.40
4	26	17	30	9.50
5	21	21	25	13.30
5	28	21	25	12.50
6	24	25	20	15.70
6	33	25	20	14.30
6	42	25	20	13.60