



## Stainless Steel Short Link Chain generally to DIN 766

- **Material** : stainless steel AISI 316
- **Standard** : generally to DIN 766
- **Note** : the minimum breaking load shown below is for guidance only, the product is not suitable for lifting purposes

diameter	length inside	width outside	minimum breaking load	weight per metre
a mm	b mm	c mm	kg	kg
3	16	11	340	0.17
4	16	14	800	0.32
5	18.5	17	1250	0.50
6	18.5	20	1600	0.75
8	24	26	3200	1.35
10	28	34	5000	2.25
12	36	40	8000	3.80
16	45	51	12500	5.70

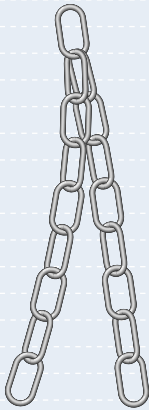

## Stainless Steel Long Link Chain generally to DIN 763

- **Material** : stainless steel AISI 316
- **Standard** : generally to DIN 763
- **Note** : the minimum breaking load shown below is for guidance only, the product is not suitable for lifting purposes

diameter	length inside	width outside	minimum breaking load	weight per metre
a mm	b mm	c mm	kg	kg
2	22	8	180	0.08
3	26	12	340	0.14
4	32	16	800	0.27
5	36	20	1250	0.43
6	42	24	1600	0.63
8	54	32	3200	1.10
10	66	40	5000	1.75
12	76	49	6300	2.99
16	100	64	8000	4.45